



ZENITH
STEELS LLC



**COMPLETE
SCAFFOLDING
SOLUTIONS**



🌐 www.zenithsteelsllc.com

MATERIAL TEST LOAD CERTIFICATES



AL HOTHY - STANGER LABORATORY LLC
Independent Testing Laboratories
and Materials Consultants

مختبرات الحوي سنانجر
مختبرات فحص مستقلة
ومستشاري المواد

LOAD TEST ON CUPLOCK LEDGER
BS EN 12813-3:2002

Client: ZENITH STEELS LLC
Address: (Dubai, UAE)
Contact Person: Mr. Rashid Garg (984481495)
Contract No.: LPO No. 180808
Project Name: QUALITY ASSURANCE
Project Number: Not Applicable
Owner: Not Applicable
Contractor: ZENITH STEELS LLC
Project Location: UAE
Sample Description: Cup Lock Ledger - 2.5m
Series / Manufacturer: ZENITH STEELS LLC
Sampled by: Client Representative
Supplier: ZENITH STEELS LLC
Sampling Date & Time: 29/05/2024
Sampling Method: Random
Test Method: BS EN 12813-3:2002
Issuing Date & Time: 29/05/2024 10:31 AM

Request No.: 18394204
Request Date: 18/04/2024

Test Results

Applied load (kN)	Mid Span Deflection (mm)
1.0	1.00
2.0	4.44
3.0	8.35
4.0	12.22
5.0	16.10
6.0	19.98
7.0	23.85

Peak load (kN): 8.27
Observation: Bending of Ledger Observed

Test witnessed by: None
Remarks: None

APRIL 2024

Approved by: Mr. Zahar Ahmad, Laboratory Manager - Dubai

THIS IS A COMPUTER GENERATED REPORT AND NO SIGNATURE IS REQUIRED
This report shall only be the complete report and shall only be reproduced in full and with approval of ALH Laboratory.

Report information only to the sample used and shall only be reproduced in full and with approval of ALH Laboratory.

AL HOTHY - STANGER LABORATORY LLC
P.O. Box 10000, Dubai, UAE
Tel: +971 4 380 0000
Fax: +971 4 380 0001
Email: info@alhothystanger.com, Website: www.alhothystanger.com

AL HOTHY - STANGER LABORATORY LLC
Independent Testing Laboratories
and Materials Consultants

مختبرات الحوي سنانجر
مختبرات فحص مستقلة
ومستشاري المواد

LOAD TEST ON CUPLOCK STANDARD
BS EN 12813-3:2002

Client: ZENITH STEELS LLC
Address: (Dubai, UAE)
Contact Person: Mr. Rashid Garg (984481495)
Contract No.: LPO No. 180808
Project Name: QUALITY ASSURANCE
Project Number: Not Applicable
Owner: Not Applicable
Contractor: ZENITH STEELS LLC
Project Location: UAE
Sample Description: Cup Lock Standard - 3m
Series / Manufacturer: ZENITH STEELS LLC
Sampled by: Client Representative
Supplier: ZENITH STEELS LLC
Sampling Date & Time: 29/05/2024
Sampling Method: Random
Test Method: BS EN 12813-3:2002
Issuing Date & Time: 29/05/2024 10:31 AM

Request No.: 18394204
Request Date: 18/04/2024

Test Results

Applied load (kN)	Mid Span Deflection (mm)
1.0	1.00
2.0	4.44
3.0	8.35
4.0	12.22
5.0	16.10
6.0	19.98
7.0	23.85

Peak load (kN): 8.27
Observation: Bending of Ledger Observed

Test witnessed by: None
Remarks: None

APRIL 2024

Approved by: Mr. Zahar Ahmad, Laboratory Manager - Dubai

THIS IS A COMPUTER GENERATED REPORT AND NO SIGNATURE IS REQUIRED
This report shall only be the complete report and shall only be reproduced in full and with approval of ALH Laboratory.

Report information only to the sample used and shall only be reproduced in full and with approval of ALH Laboratory.

AL HOTHY - STANGER LABORATORY LLC
P.O. Box 10000, Dubai, UAE
Tel: +971 4 380 0000
Fax: +971 4 380 0001
Email: info@alhothystanger.com, Website: www.alhothystanger.com

AL HOTHY - STANGER LABORATORY LLC
Independent Testing Laboratories
and Materials Consultants

مختبرات الحوي سنانجر
مختبرات فحص مستقلة
ومستشاري المواد

LOAD TEST ON CUPLOCK LEDGER
BS EN 12813-3:2002

Client: ZENITH STEELS LLC
Address: (Dubai, UAE)
Contact Person: Mr. Rashid Garg (984481495)
Contract No.: LPO No. 180808
Project Name: QUALITY ASSURANCE
Project Number: Not Applicable
Owner: Not Applicable
Contractor: ZENITH STEELS LLC
Project Location: UAE
Sample Description: Cup Lock Ledger - 2.5m
Series / Manufacturer: ZENITH STEELS LLC
Sampled by: Client Representative
Supplier: ZENITH STEELS LLC
Sampling Date & Time: 29/05/2024
Sampling Method: Random
Test Method: BS EN 12813-3:2002
Issuing Date & Time: 29/05/2024 10:31 AM

Request No.: 18394204
Request Date: 18/04/2024

Test Results

Applied load (kN)	Mid Span Deflection (mm)
1.0	1.00
2.0	4.44
3.0	8.35
4.0	12.22
5.0	16.10
6.0	19.98
7.0	23.85

Peak load (kN): 8.27
Observation: Bending of Ledger Observed

Test witnessed by: None
Remarks: None

APRIL 2024

Approved by: Mr. Zahar Ahmad, Laboratory Manager - Dubai

THIS IS A COMPUTER GENERATED REPORT AND NO SIGNATURE IS REQUIRED
This report shall only be the complete report and shall only be reproduced in full and with approval of ALH Laboratory.

Report information only to the sample used and shall only be reproduced in full and with approval of ALH Laboratory.

AL HOTHY - STANGER LABORATORY LLC
P.O. Box 10000, Dubai, UAE
Tel: +971 4 380 0000
Fax: +971 4 380 0001
Email: info@alhothystanger.com, Website: www.alhothystanger.com

AL HOTHY - STANGER LABORATORIES
Independent Testing Laboratories
and Materials Consultants

مختبرات الحوي سنانجر
مختبرات فحص مستقلة
ومستشاري المواد

TEST REPORT
ZENITH STEELS LLC
SLIPPING FORCE ON COUPLER
BS EN 74-1:2005

Report date: 25.02.2020

Report number: IDS-75612-1
Project name: Quality Assurance
Client ref.no.: Not given
Sample description as identified by client: Double Coupler
Series: Zenith Steels LLC
Local Supplier: Zenith Steels LLC
Sampled by: Client Rep.
Date time sample received: 17.02.2020 - 14:50 Hrs.
Date tested: 24.02.2020
Tested by, name/location: DR. DYR
Marking: Forged SF - L - EN 74 - 1b

Test parameter	Result	Specified Value, kN EN 74-1:2005 Table 8	Remarks
Slipping force, kN	25.25	15.0	Meets the specification limits.

Test method variation: None

Remarks: Test method variation: None

Signature: [Signature]
Author: Raha Dr. Materials Technician
For Al Hothy- Stanger Laboratory - UAE

Signature: [Signature]
Author: Raha Dr. Materials Technician
For Al Hothy- Stanger Laboratory - UAE

THIS REPORT SHALL ONLY BE THE COMPLETE REPORT AND SHALL ONLY BE REPRODUCED IN FULL AND WITH APPROVAL OF ALH LABORATORIES.

Report information only to the sample used and shall only be reproduced in full and with approval of ALH Laboratory.

AL HOTHY - STANGER LABORATORIES
P.O. Box 10000, Dubai, UAE
Tel: +971 4 380 0000
Fax: +971 4 380 0001
Email: info@alhothystanger.com, Website: www.alhothystanger.com

AL HOTHY - STANGER LABORATORIES
Independent Testing Laboratories
and Materials Consultants

مختبرات الحوي سنانجر
مختبرات فحص مستقلة
ومستشاري المواد

TEST REPORT
ZENITH STEELS LLC
SLIPPING FORCE ON COUPLER
BS EN 74-1:2005

Report date: 25.02.2020

Report number: IDS-75612-1
Project name: Quality Assurance
Client ref.no.: Not given
Sample description as identified by client: Single Coupler
Series: Zenith Steels LLC
Local Supplier: Zenith Steels LLC
Sampled by: Client Rep.
Date time sample received: 17.02.2020 - 14:50 Hrs.
Date tested: 24.02.2020
Tested by, name/location: DR. DYR
Marking: Forged SF - L - EN 74 - 1b

Test parameter	Result	Specified Value, kN EN 74-1:2005 Table 8	Remarks
Slipping force, kN	18.25	10.0	Meets the specification limits.

Test method variation: None

Remarks: Test method variation: None

Signature: [Signature]
Author: Raha Dr. Materials Technician
For Al Hothy- Stanger Laboratory - UAE

Signature: [Signature]
Author: Raha Dr. Materials Technician
For Al Hothy- Stanger Laboratory - UAE

THIS REPORT SHALL ONLY BE THE COMPLETE REPORT AND SHALL ONLY BE REPRODUCED IN FULL AND WITH APPROVAL OF ALH LABORATORIES.

Report information only to the sample used and shall only be reproduced in full and with approval of ALH Laboratory.

AL HOTHY - STANGER LABORATORIES
P.O. Box 10000, Dubai, UAE
Tel: +971 4 380 0000
Fax: +971 4 380 0001
Email: info@alhothystanger.com, Website: www.alhothystanger.com

AL HOTHY - STANGER LABORATORIES
Independent Testing Laboratories
and Materials Consultants

مختبرات الحوي سنانجر
مختبرات فحص مستقلة
ومستشاري المواد

TEST REPORT
ZENITH STEELS LLC
SLIP TEST

Report date: 25.02.2020

Report number: IDS-75612-1
Project name: Quality Assurance
Client ref.no.: Not given
Sample description as identified by client: BRC Coupler
Series: Zenith Steels LLC
Local Supplier: Zenith Steels LLC
Sampled by: Client Rep.
Date time sample received: 17.02.2020 - 14:50 Hrs.
Date tested: 24.02.2020
Tested by, name/location: DR. DYR
Marking: Forged SF - L - BS - 1139

Test parameter	Result	Specified Value, kN EN 74-1:2005 Table 8	Remarks
Slipping force, kN	8.45	10.0	Meets the specification limits.

Test method variation: None

Remarks: Test method variation: None

Signature: [Signature]
Author: Raha Dr. Materials Technician
For Al Hothy- Stanger Laboratory - UAE

Signature: [Signature]
Author: Raha Dr. Materials Technician
For Al Hothy- Stanger Laboratory - UAE

THIS REPORT SHALL ONLY BE THE COMPLETE REPORT AND SHALL ONLY BE REPRODUCED IN FULL AND WITH APPROVAL OF ALH LABORATORIES.

Report information only to the sample used and shall only be reproduced in full and with approval of ALH Laboratory.

AL HOTHY - STANGER LABORATORIES
P.O. Box 10000, Dubai, UAE
Tel: +971 4 380 0000
Fax: +971 4 380 0001
Email: info@alhothystanger.com, Website: www.alhothystanger.com



ABOUT US

ZENITH STEEL LLC is a leading supplier of Scaffolding, Scaffolding Fitting and Accessories, Formwork and Accessories, Hardware and Customized products. Known for our ethical business practices, we have a professionally managed group of highly experienced professionals, who are working towards meeting our client's product needs. We offer products like Tierod, Wingnuts, Waller Plates, Waterstopper, all kind of Jacks Like Base Jacks, U Jacks and Accessories like Nuts, Plates, all kind of Couplers Like Forged, Brc, Put Log, Sleeve, Girder, Props, Cup Lock and its Accessories etc.

With our complete inhouse production processes , we offer our clients solution to all kind of needs and customization.

Further, we are exporting our products to Middle-East, Eastern African Countries, USA, Europe, and South-East Asia and with new customers coming from different parts of the world, it is an evidence of our products quality, our services and our reasonable prices.



* #

FIX COUPLER FORGED 48/48

Weight 0.95 kg



* #

SWIVEL COUPLER FORGED 48/48

Weight 1.05 kg



* #

FIX COUPLER FORGED 48/60

Weight 1.15kg



* #

SWIVEL COUPLER FORGED 48/60

Weight 1.25 kg



* #

FIX COUPLER SHEET 48/48

Weight 0.650 kg



* #

SWIVEL COUPLER SHEET 48/48

Weight 0.750 kg



* #

FIX COUPLER SHEET 48/60

Weight 0.720 kg



* #

SWIVEL COUPLER SHEET 48/60

Weight 0.770 kg



* #

PUTLOG COUPLER EURO

Weight 0.610 kg



* #

BRC COUPLER GULF

Weight 0.610 kg



* #

PUTLOG COUPLER EURO

Weight 0.610 kg



* #

PUTLOG GULF

Weight 0.610 kg



* #

GIRDER CLAMP

Weight 1.45 kg



* #

ROOFING COUPLER

Weight 1.30 kg



* #

FENCING COUPLER

Weight 0.34 kg



* #

SLEEVE COUPLER GULF

Weight 1.00 kg



* #

SLEEVE COUPLER EURO


Weight 1.00 kg



* #

LADDER CLAMP

Weight 0.48 kg

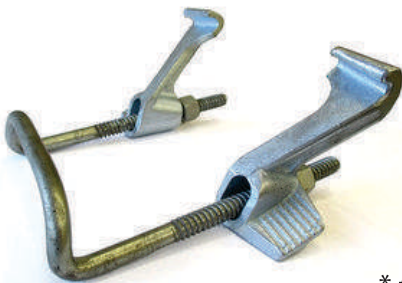

* #

FLANGE CLAMP


Weight 0.85 kg



* #

H2O CLAMP

Weight 0.60 kg



* #

UNIVERSAL CLAMP

Weight 0.48 kg



* #

BAND PLATE

Weight 0.45 kg



* #

T BOARD COUPLER


Weight 0.34 kg



* #

C CLAMP

Weight 0.65 kg

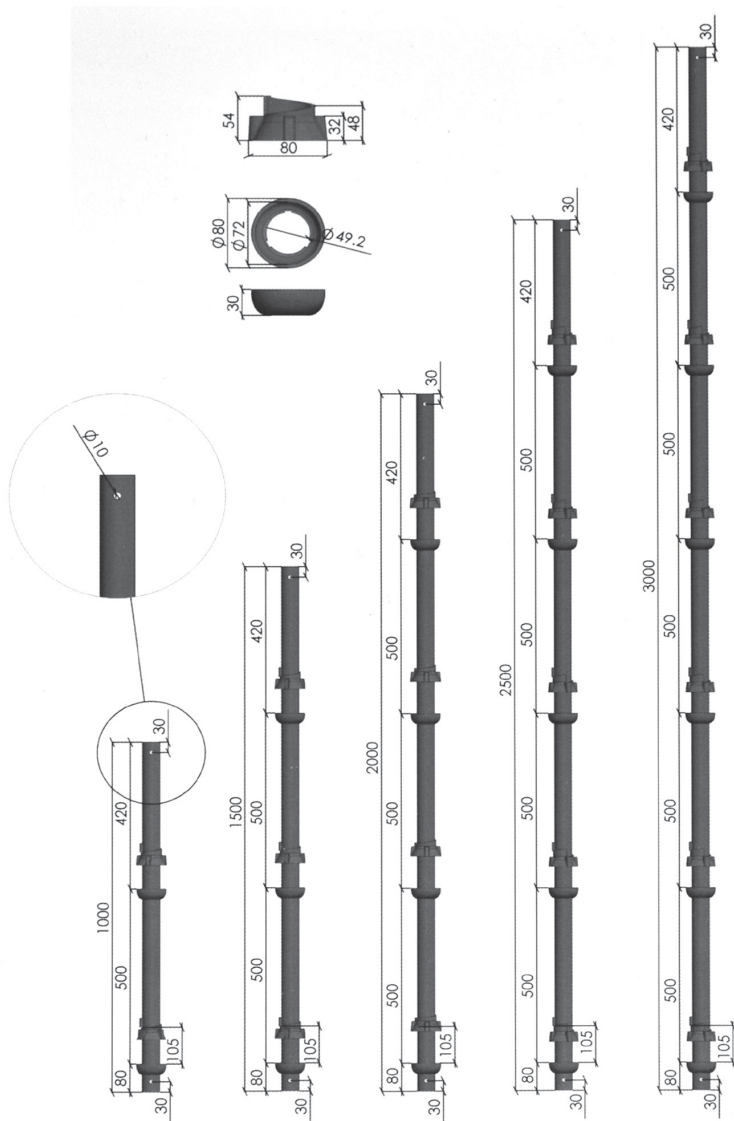

* #

CUPLOCK STANDARD

Thickness 3mm/3.2mm



* #

CUPLOCK LEDGER

Thickness 3mm/3.2mm



* #

INTERMEDIATE TRANSOME

Thickness 3mm/3.2mm



* #

DROP HEAD

Weight 4.8 kg

CANTILIVER FRAME

Weight 15.8 kg



* #

SAFETY HANDRAIL

Weight 3.9 kg

S.NO	SIZE	WEIGHT / PC (3MM)	WEIGHT/ PC (3.2 MM)	RATE
1	CUPLOCK STANDARD 1 MTR (3.2 MM)	4.53 KG	4.7 KG	
2	CUPLOCK STANDARD 1.50 MTR (3.2 MM)	6.75 KG	7.1 KG	
3	CUPLOCK STANDARD 2 MTR (3.2 MM)	9.00 KG	9.4 KG	
4	CUPLOCK STANDARD 2.5 MTR (3.2 MM)	11.25 KG	11.8 KG	
5	CUPLOCK STANDRAD 3 MTR (3.2 MM)	13.50 KG	14.1 KG	


S.NO	SIZE	WEIGHT / PC (3MM)	WEIGHT/ PC (3.2 MM)	RATE
1	CUPLOCK LEDDER 1 MTR (3.2 MM)	3.47 KG	3.6 KG	
2	CUPLOCK LEDDER 1.2 MTR (3.2 MM)	4.13 KG	4.4 KG	
3	CUPLOCK LEDDER 1.3 MTR (3.2 MM)	4.46 KG	4.7 KG	
4	CUPLOCK LEDDER 1.5 MTR (3.2 MM)	5.12 KG	5.4 KG	
5	CUPLOCK LEDDER 1.6 MTR (3.2 MM)	5.45 KG	5.75	
6	CUPLOCK LEDDER 1.8 MTR (3.2 MM)	6.11 KG	6.45	
7	CUPLOCK LEDDER 2.5 MTR (3.2 MM)	8.42 KG	8.9 KG	

S.NO	SIZE	WEIGHT / PC (3MM)	WEIGHT/ PC (3.2 MM)	RATE
1	CUPLOCK TRANSOME 0.9 MTR (3.2 MM)	4.56 KG	4.7 KG	
2	CUPLOCK TRANSOME 1 MTR (3.2 MM)	4.89 KG	5.0 KG	
3	CUPLOCK TRANSOME 1.2 MTR (3.2 MM)	5.55 KG	5.8 KG	
4	CUPLOCK TRANSOME 1.30 MTR (3.2 MM)	5.88 KG	6.2 KG	
5	CUPLOCK TRANSOME 1.50 MTR (3.2 MM)	6.54 KG	6.8 KG	
6	CUPLOCK TRANSOME 1.60 MTR (3.2 MM)	6.87 KG	7.2 KG	
7	CUPLOCK TRANSOME 1.80 MTR (3.2 MM)	7.53 KG	7.9 KG	
8	CUPLOCK TRANSOME 2.50 MTR (3.2 MM)	9.84 KG	10.4 KG	

S.NO	PRODUCT	WEIGHT
1	Decking Beam 1200mm	14KG
2	Decking Beam 1800mm	21KG
3	Decking Beam 2500mm	29KG

S.NO	PRODUCT	WEIGHT
1	Infill Beam 1000mm	4.95KG
2	Infill Beam 1250mm	5.95KG
3	Infill Beam 1600mm	7.90KG
4	Infill Beam 1800mm	8.75KG


PLEASE NOTE : TOP CUP AVAILABLE DROP FORGED AND CASTED
 BOTTOM CUP AVAILABLE IS PRESSED
 LEDGER BLADE IS DROP FORGED
 FINISH AVAILABLE - PAINTED , HOT GALVANISED, ZINC PLATED
 PACKING DONE IN STEEL PALLETS

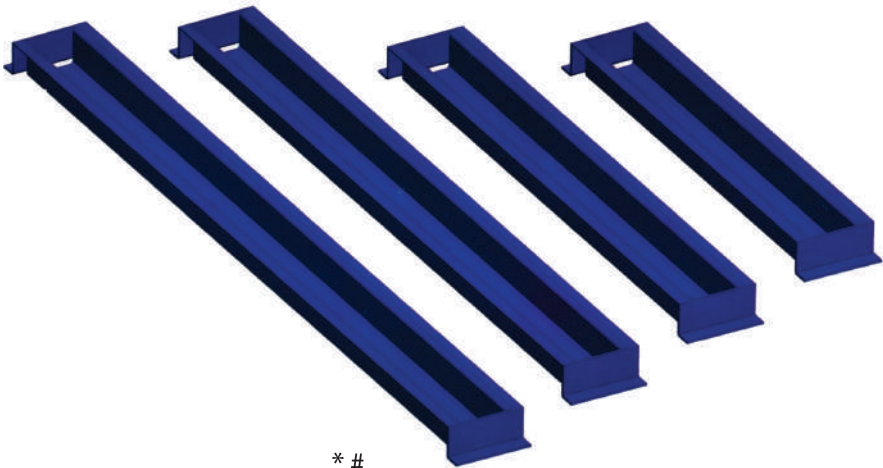

* #

DECKING BEAM


Please refer page 4 for size details

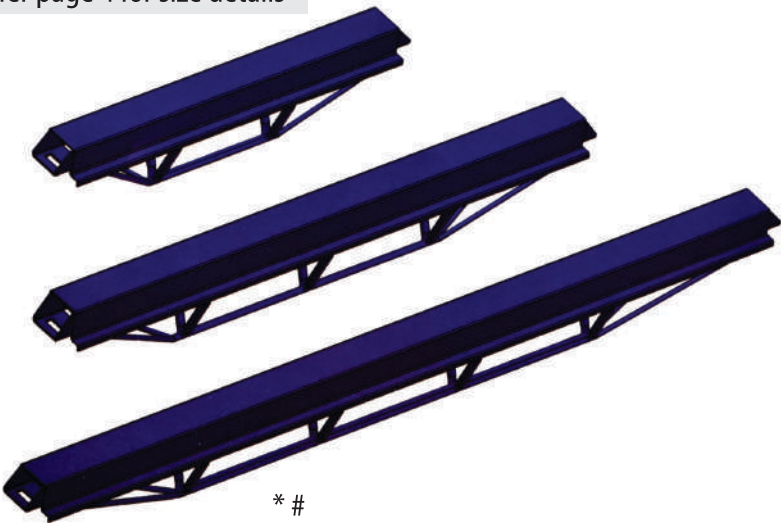

* #

INFILL BEAM

Please refer page 4 for size details

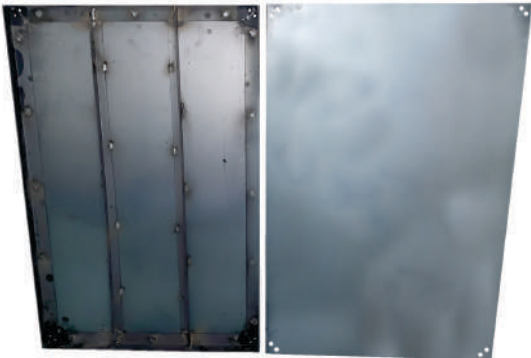

* #

SHUTTERING PLATE

Size as per drawing

ACCESSORIES



* #

TOP CUP CASTED

Weight 0.40 kg



* #

TOP CUP FORGED

Weight 0.41 kg



* #

LEDGER PLATE



Weight 0.19kg



* #

BOTTOM CUP

Weight 0.19 kg

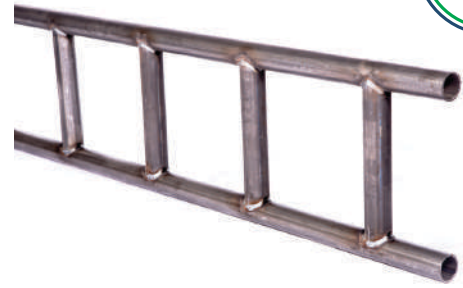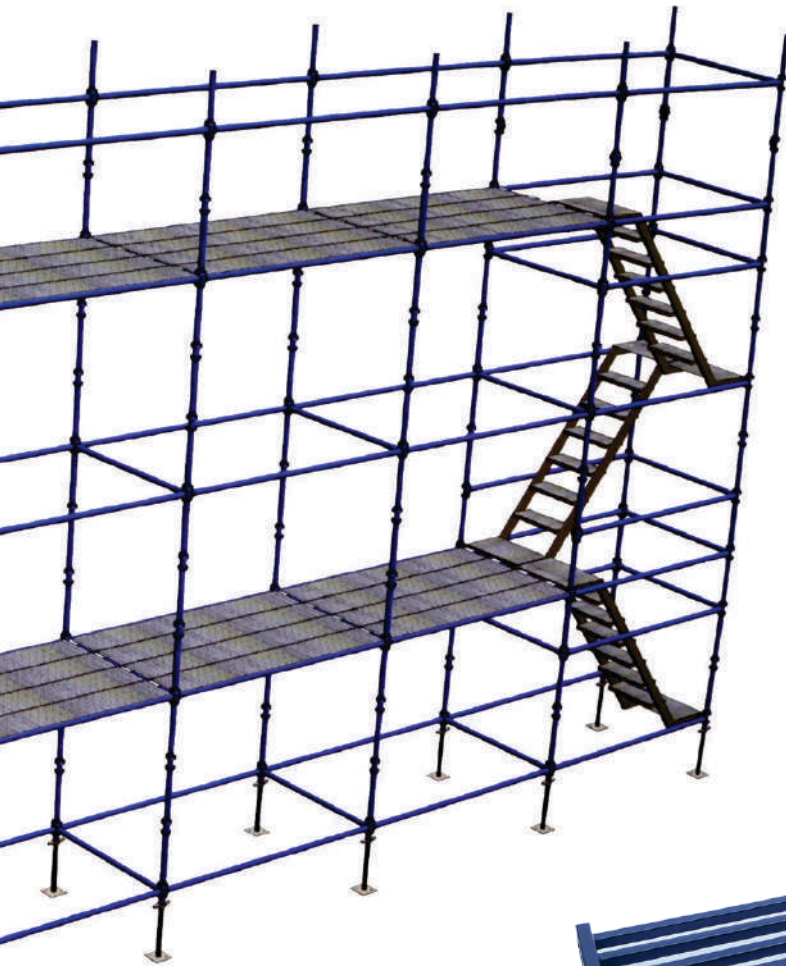

BEAM LADDERS WITH SADDLE CUT


ALL WEIGHTS FOR 350 MM WIDTH AND 330 MM STEP DISTANCE

S.NO	PRODUCT	WEIGHT
1	BEAM LADDER 2 MTR X 3.2 MM	20.75 KG
2	BEAM LADDER 3 MTR X 3.2 MM	31.1 KG
3	BEAM LADDER 4 MTR X 3.2 MM	41.5 KG
4	BEAM LADDER 5 MTR X 3.2 MM	51.8 KG
5	BEAM LADDER 6 MTR X 3.2 MM	62.2 KG

PLEASE NOTE :
PIPE THICKNESS AVAILABLE 3 MM - 4 MM



MS CHALI | WALKAWAY PLATFORM

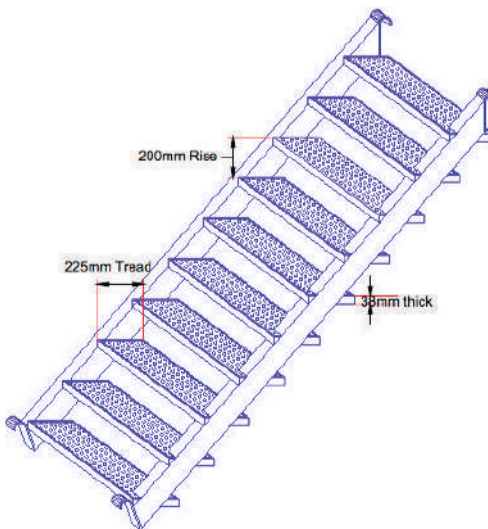

STAIR LADDER

size	1.5 mtr --70 kg
size	2.5 mtr -- 134 kg



STEEL BOARDS

BOARD SIZE 225 MM X 38 X 1.5 MM WITH STIFFNER SUPPORT

S.NO	PRODUCT	WEIGHT
1	STEEL BOARD 1 MTR X 1.5 MM	3.5 KG
2	STEEL BOARD 1.5 MTR X 1.5 MM	5.25 KG
3	STEEL BOARD 2 MTR X 1.5 MM	7 KG
4	STEEL BOARD 2.5 MTR X 1.5 MM	8.75 KG
5	STEEL BOARDS 3 MTR X 1.5 MM	10.5 KG

PLEASE NOTE :
BOARD THICKNESS AVAILABLE 1.5 MM - 4 MM



BASE JACK HOLLOW
Plate 150×150×5 mm



U HEAD JACK HOLLOW
U-Head 150×170×190×5mm



BASE JACK EUROPE
Lentgh 660/760 mm



UNIVERSAL JACK
Lentgh 660/760 mm





BASE JACK SOLID
Rod Thickness 28-40mm



U HEAD JACK SOLID
Rod Thickness 28-40mm

S.NO	PRODUCT	WEIGHT/PC
1	BASE JACK 660 MM	3.15 KG
2	BASE JACK 760 MM	3.6 KG
3	U HEAD JACK 660 MM	4.15 KG
4	U HEAD JACK 760 MM	4.6 KG
5	JOINT PIN 300 MM WITH NUT BOLTS	600 GM
6	JOINT PIN 250 MM WITH NUT BOLTS	520 GM
7	JOINT PIN 300 MM WITH WASHER	580 GM
8	JOINT PIN 250 MM WITH WASHER	500 GM
9	BASE PLATE 150 X 150 X 5 MM . ALL KIND OF CROSS SECTIONS AND THICKNESS AVAILABLE FOR PIPES .	

PLEASE NOTE :
PIPE THICKNESS FOR JACKS 3.6 - 4 MM AS PER REQUIREMENT
BASE AND U HEAD THICKNESS AND SIZE ADJUSTABLE AS PER REQUIREMENT
PIPE THICKNESS FOR JOINT PIN 2 - 3 MM AS PER REQUIREMENT
FINISH AVAILABLE - ELECTROGALVANISED , HOT DIP AND PAINTED
NUTS USED JACKS IS DROP FORGED
PACKING AVAILABLE IN STEEL AND WOODEN PALLETS

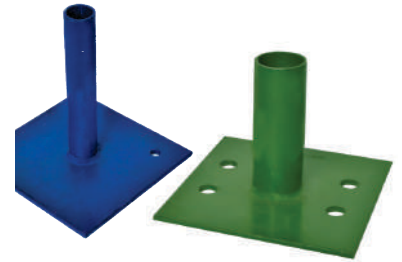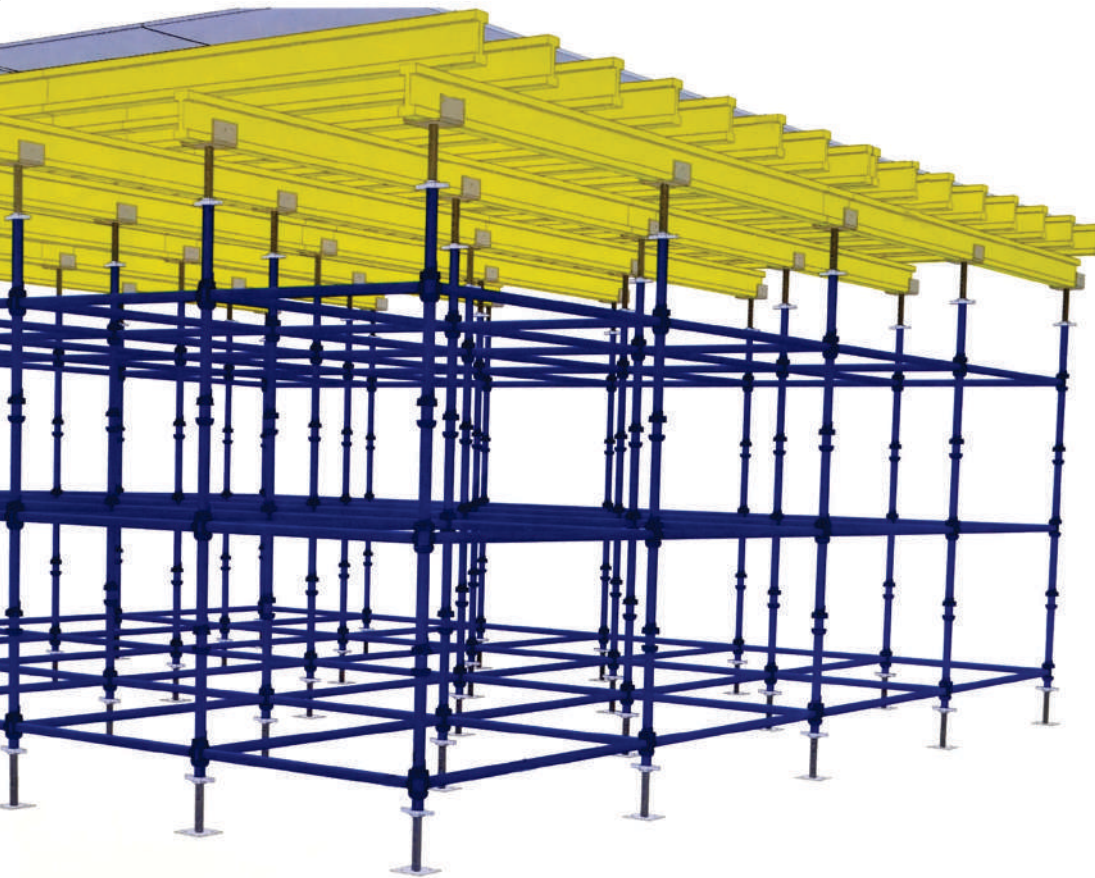

BASE PLATE

Plate 150×150×5 mm



JOINT COUPLER

Weight .680 kg



JOINT PIN

Lentgh 250/300mm



SPIGOT PIN

Lentgh 250/300 mm



SHORE PIN

Weight 0.600 kg



SPIGOT PIN DOUBLE SUPPORT

Lentgh 250/300 mm



SPIGOT PIN SQUARE

Lentgh 250/300 mm



JACKNUT CASTED/FORGED

Weight 0.41 kg



TABLE SYSTEM



TRIPOD



SHORING PROP



FORKHEAD HEAVY

Weight 3.8 kg



FORKHEAD MEDIUM

Weight 3.0 kg



FORKHEAD LIGHT

Weight 2.5 kg



PROP JACK

Lentgh 2mtr-4mtr
Thickness 1.8-2.5mm



76 O.D SLEEVE

Lentgh 210-300mm
Thickness 3.2-4 mm



60 O.D SLEEVE

Lentgh 210-300mm
Thickness 2.9-4.0 mm



G LOCK PIN

Thickness 10-16mm




PROP PLATE


Size 117 * 117 mm
Thickness 3.5-6 mm



ACCESSORIES

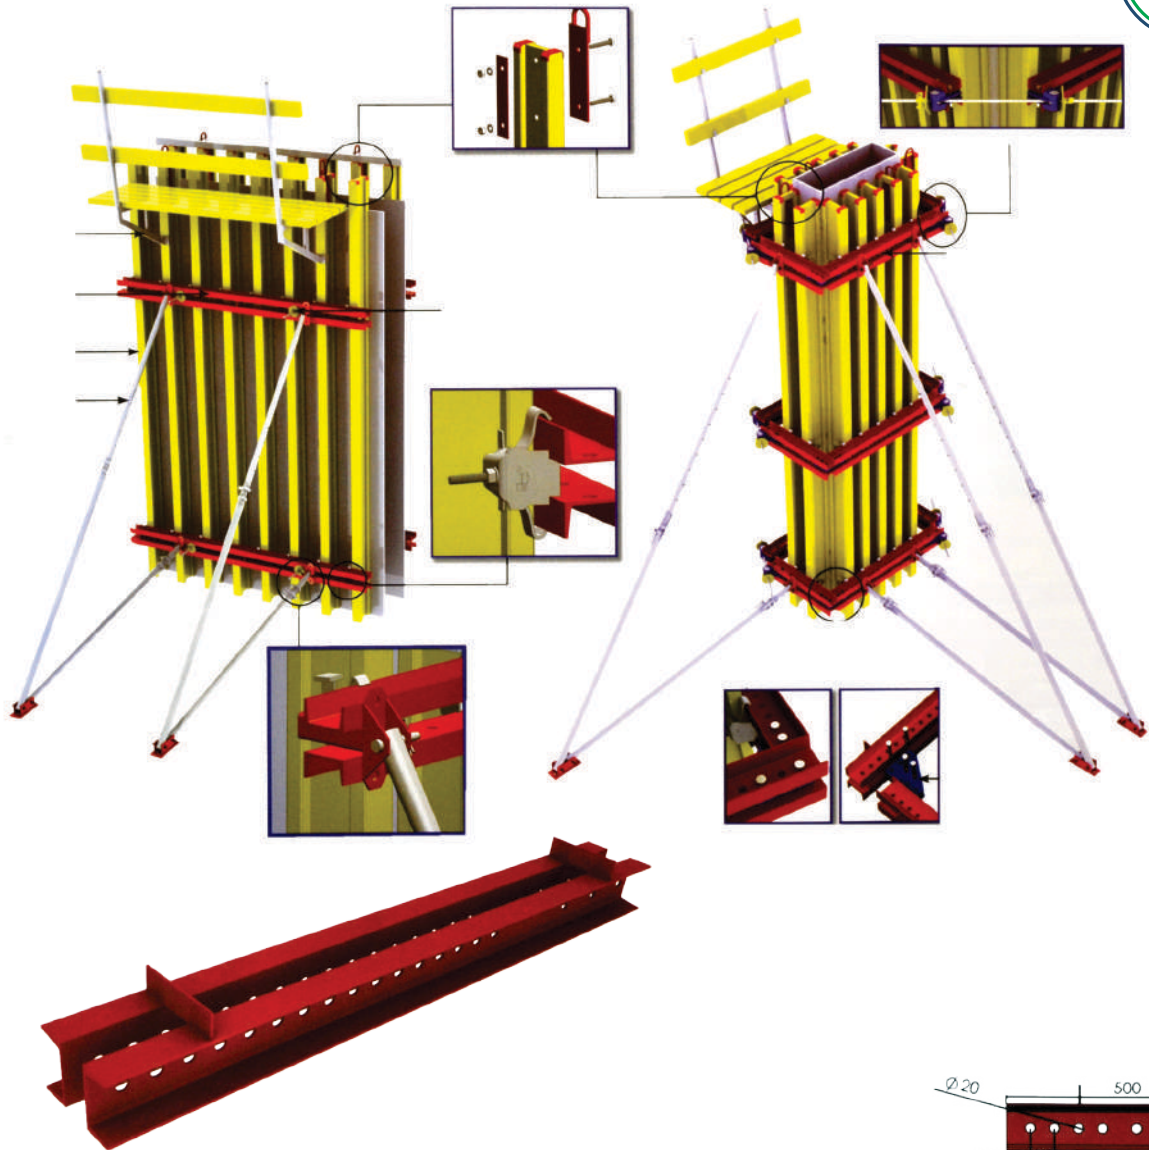

S.NO	PRODUCT	WEIGHT
1	STEEL WALLER - 0.50 MTR	11 KG
2	STEEL WALLER - 0.75 MTR	16.5 KG
3	STEEL WALLER - 1 MTR	22 KG
4	STEEL WALLER - 1.25 MTR	27.5 KG
5	STEEL WALLER - 1.50 MTR	33 KG
6	STEEL WALLER - 1.75 MTR	38.5 KG
7	STEEL WALLER - 2.0 MTR	44 KG
8	STEEL WALLER - 2.25 MTR	49.5 KG
9	STEEL WALLER - 2.40 MTR	52.8 KG

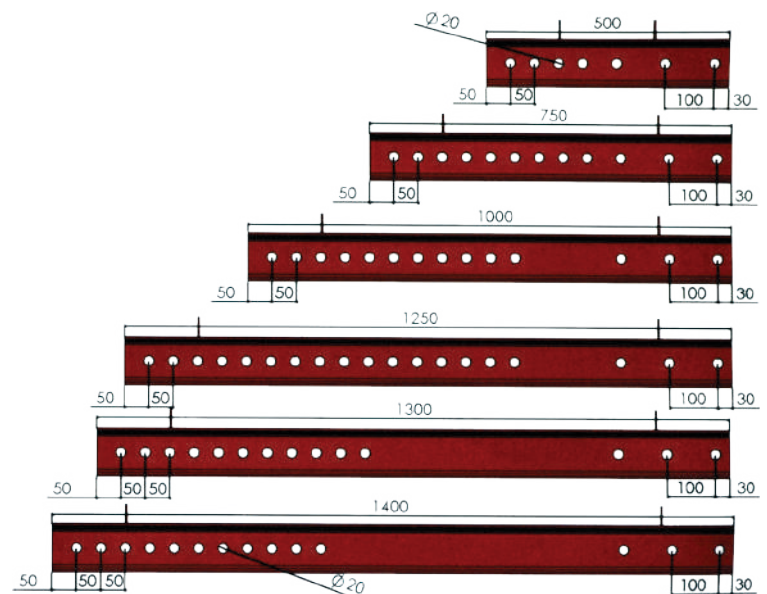

STEEL WALLERS




SUPPORT BRACKET

Weight	11 kg
--------	-------



ANGLE TIE

Weight	4.5 kg
--------	--------

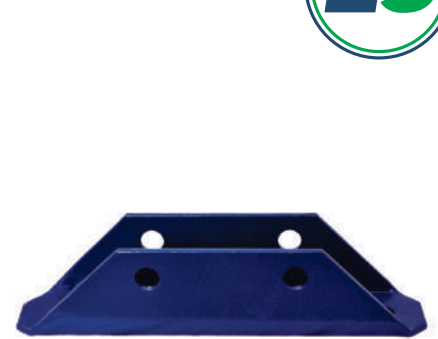

BASE SUPPORT

Weight	4 kg
--------	------



EXTENSION SPLICE

550 mm	5.7 kg
750 mm	7.8 kg



SINGLE BASE

Weight	1.49 kg
--------	---------



CORNER BRACKET


Weight	2.1 kg
--------	--------



WOODEN PLANK



H20 BEAM

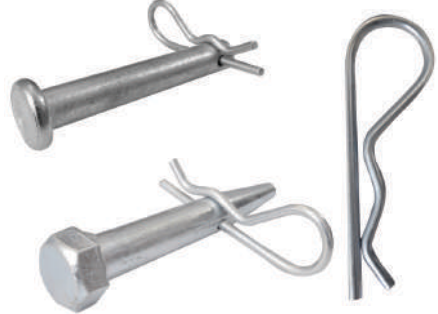


TENSION PINS

16 mm	.200 kg
19 mm	.350 kg
Material	8.8 grade boron steel



PUSH PULL PROP

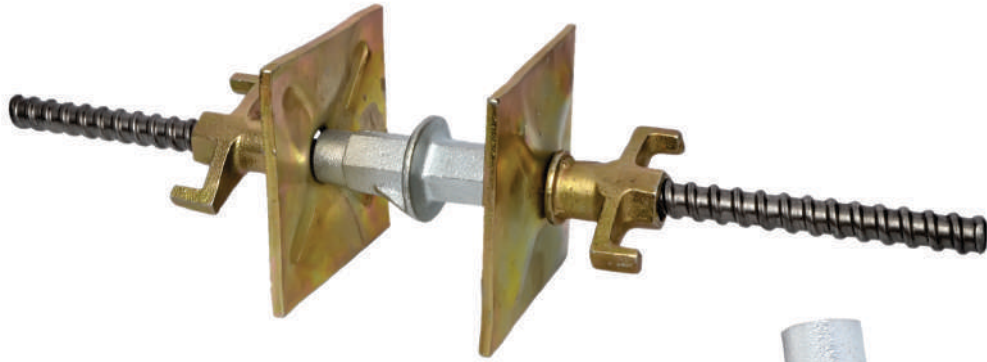


TIEROD

size	16 mm
weight	8.1 / 8.3 8.8 / 9 kg
Finish	Self / Galvanised



WATERSTOPPER

size	16 mm/20mm
material	Casted / Forged
thread	ACME/BSW

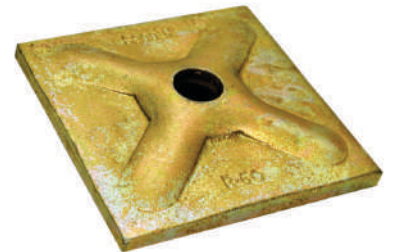

WALLER PLATE

Size	120 x 120 mm
Thickness	4 mm - 10 mm
Finish	Galvanised



SHUTTERING CLAMP

Width	25-40 mm
Thickness	4.5-8 mm
Size as per requirement	




HEX NUT

size	16 mm/20mm
material	Casted / Forged
thread	ACME/BSW



COMBINATION PLATE

size	16 mm/20mm
material	Casted / Forged
thread	ACME/BSW

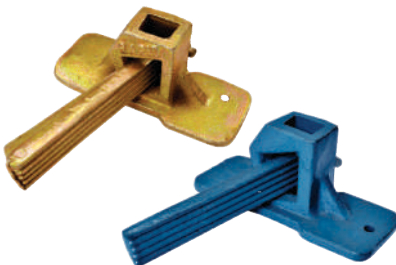


RAPID CLAMP

weight	310/400kg
Finish	Powder Coated/ Galvanised



L BOLT

Thickness	8-14 mm
Lentgh	as per requirement
Finish	Self / Galvanised

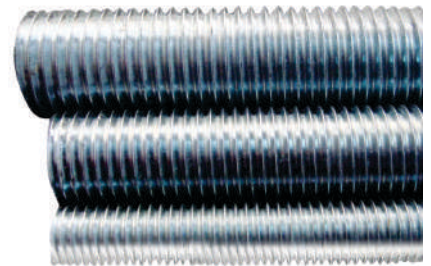

THREAD BAR

Thickness	8-14 mm
Lentgh	as per requirement
Finish	Self / Galvanised



ANCHOR NUT HEAVY
size 90 /100mm



ANCHOR NUT MEDIUM
size 90 /100mm



ANCHOR NUT LIGHT
size 90 /100mm



H FRAME SYSTEM


TIEROD BRITISH THREAD
size 16 / 20 mm



WINGNUT HEAVY
size 16 / 20 mm



KOREAN FRAME

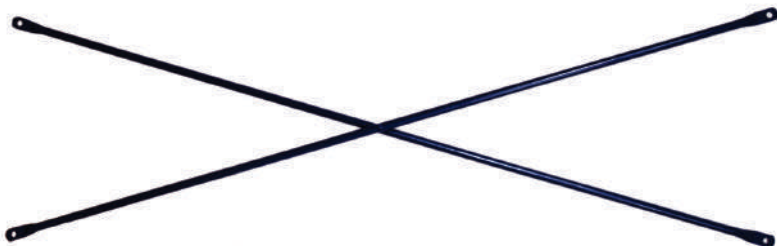


CROSS BRACE



JOINT PIN



LOCK PIN

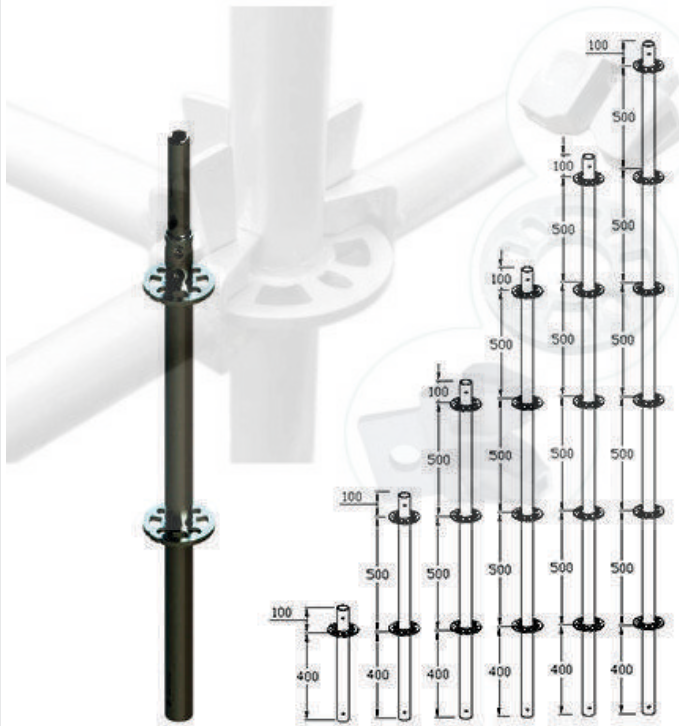

RINGLOCK STANDARD

S.NO	PRODUCT	WEIGHT/PC
1	LOCK STANDARD .5 MTR WITH JOINT PIN	3.2 KG
2	LOCK STANDARD 1 MTR WITH JOINT PIN	5.70 KG
3	LOCK STANDARD 1.5 MTR WITH JOINT PIN	8.0 KG
4	LOCK STANDARD 2 MTR WITH JOINT PIN	10.40 KG
5	LOCK STANDARD 2.5 MTR WITH JOINT PIN	12.80 KG
6	LOCK STANDARD 3 MTR WITH JOINT PIN	15.0 KG
7	LOCK STANDARD 4 MTR WITH JOINT PIN	20.20 KG

S.NO	PRODUCT	WEIGHT/PC
1	LOCK LEDGER WITH CASTED END .4 MTR	2.32 KG
2	LOCK LEDGER WITH CASTED END .73 MTR	3.38 KG
3	LOCK LEDGER WITH CASTED END 1.09 MTR	4.74 KG
4	LOCK LEDGER WITH CASTED END 1.40 MTR	6.57 KG
5	LOCK LEDGER WITH CASTED END 1.57 MTR	6.57 KG
6	LOCK LEDGER WITH CASTED END 2.07 MTR	8.46 KG
7	LOCK LEDGER WITH CASTED END 2.57 MTR	10.36 KG
8	LOCK LEDGER WITH CASTED END 3.07 MTR	12.22 KG

S.NO	PRODUCT	WEIGHT/PC
1	LOCK DIAGNAL BRACE 3.2 MM WITH CASTED END 0.5 MTR	2.45 KG
2	LOCK DIAGNAL BRACE 3.2 MM WITH CASTED END 1.0 MTR	4.90 KG
3	LOCK DIAGNAL BRACE 3.2 MM WITH CASTED END 1.5 MTR	7.30 KG
4	LOCK DIAGNAL BRACE 3.2 MM WITH CASTED END 2.0 MTR	10.14 KG
5	LOCK DIAGNAL BRACE 3.2 MM WITH CASTED END 2.5 MTR	12.65 KG
6	LOCK DIAGNAL BRACE 3.2 MM WITH CASTED END 3.0 MTR	15.20 KG



RING LOCK LEDGER



CROSS BAR



STAGE STANDARD

S.NO	PRODUCT	WEIGHT/PC
1	STANGE STANDARD .5 MTR (3.2 MM)	2.4 KG
2	STAGE STANDARD 1 MTR (3.2 MM)	4.82 KG
3	STAGE STANDARD 1.5 MTR (3.2 MM)	7.23 KG
4	STAGE STANDARD 2 MTR (3.2 MM)	9.65 KG
5	STAGE STANDARD 2.5 MTR (3.2 MM)	12.07 KG
6	STAGE STANDARD 3 MTR (3.2 MM)	14.49 KG



STAGE LEDGER

S.NO	PRODUCT	WEIGHT/PC
1	STAGE LEDGER .6 MTR (3.2 MM)	3 KG
2	STAGE LEDGER 1 MTR (3.2 MM)	3.5 KG
3	STAGE LEDGER 1.25 MTR (3.2 MM)	3.92 KG
4	STAGE LEDGER 1.5 MTR (3.2 MM)	5.04 KG
5	STAGE LEDGER 1.8 MTR (3.2 MM)	5.86 KG
6	STAGE LEDGER 2 MTR (3.2 MM)	6.51 KG
7	STAGE LEDGER 2.5 MTR (3.2 MM)	7.98 KG



we help you build



ZENITH
STEELS LLC



WH No.2, Street No.23, Ras Al Khor,
Industrial Area 2, P.O. Box 239284, Dubai (UAE)
+971 544 314 285,  +91 9034 558 285
zenithsteelsllc@gmail.com
www.zenithsteelsllc.com